

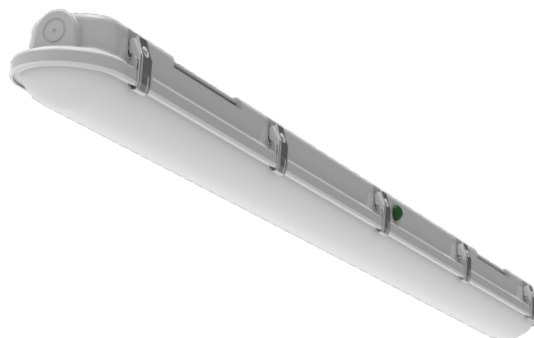


DURA

DURA-12-EM
SAP CODE: 2002143

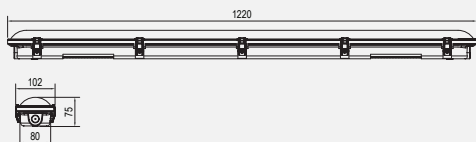

Photometric Diagram



Unit: cd
 - C0/180 128.6deg
 - C90/270 113.5deg

Emergency weatherproof batten

The DURA LED batten features IP65 ingress protection, IK08 impact resistance rating and a unique foldable structure for easy installation.

It is ideal for use in utility-type applications such as car parks, workshops, storerooms and back of house areas.

KEY INFORMATION

Watts	36W
Input Power	18W / 25W / 30W / 36W
Lumen Output	2425lm / 3089lm / 3706lm / 4318lm (4000K) 2474lm / 3242lm / 3917lm / 4627lm (4500K) 2474lm / 3083lm / 3726lm / 4367lm (5000K)
Install	Surface Mount, Suspended
Dimming Options	Non-Dimmable
Fitting Colour	Grey
Warranty	5yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Emergency Classification	C0: D100, C90: D63
Rebate Scheme Approval	-

PHOTOMETRIC

Efficacy	135lm / 124lm / 124lm / 120lm (4000K) 137lm / 130lm / 131lm / 129lm (4500K) 137lm / 123lm / 124lm / 121lm (5000K)
LED	SMD
CCT	4000K / 4500K / 5000K
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	57-108V
Power Factor	>0.9
LED Input Current (nominal)	175/240/290/350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	PC
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Clips, Cable gland, Suspension bracket
Connection Type	PA14 Terminals
Total Weight	2.0kg
Dimensions	1220 x 102 x 75mm
Operating Ambient Temp.	0 to 40°C
Electrical Classification	Class 1

EMERGENCY

Battery	LiFePO4 6.4V 1.5Ah
Charge Time	16 hours
Discharge Duration	3 hours
Emergency Classification	C0/D100,C90/D63
Test Facility	Manual Test
Operation	Maintained

MAXIMUM SPACING FOR CLASS D LUMINAIRES

Luminaire Classification	Maximum Spacings Mounting Height (Metres)															
	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10	15	20
D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3	7.7	
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6	
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7	15.2
D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0	22.5