



TRIPROOF

Weatherproof Battens



TRITONE
Colour
Changeable



IP65
Ingress
Protection
Rating



IK08
Impact
Rating



HACCP
Food
Safe



50,000hr
Expected
Lifetime



5yr
Warranty

Tried and trusted design.

TRIPROOF are weatherproof LED battens with a striking robust design and suitability for higher ambient temperatures. HACCP approval makes them the perfect choice for food and beverage manufacturing.

Features

- Tritone and power switchable
- IP65 and IK08 rating
- Suitable for use up to 45°C
- Stainless steel clips (301 chrome-nickel)
- Emergency versions
- Sensor models
- HACCP approved

Benefits

- Reduced SKUs and inventory levels
- Designed to last in harsh environments
- Longer lasting in hot environments
- Anti corrosive for enhanced longevity
- Provides safety in case of power outages
- Supports power conservation
- Suitable for food manufacturing

Product Overview

Nominal Length 600mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W	1850 lm	93 lm/W	4000K	618 x 116 x 74mm	2.00kg 2.20kg	2001164 2001165	TRIPROOF20W06-TRI TRIPROOF20W06-TRI-EM
	1990 lm	100 lm/W	5000K				
	1850 lm	93 lm/W	6500K				

Nominal Length 1200mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W (Ecoswitch)	2230 lm	111 lm/W	4000K	1215 x 116 x 74mm	2.00kg 2.20kg	2001168 2001066	TRIPROOF20/40W12-TRI TRIPROOF20/40W12-TRI-EM
	2250 lm	113 lm/W	5000K				
	1970 lm	98 lm/W	6500K				
40W	4090 lm	102 lm/W	5000K				
	4410 lm	110 lm/W	4000K				
	4050 lm	101 lm/W	6500K				
40W	4090 lm	102 lm/W	5000K	1215 x 116 x 74mm	2.00kg 2.20kg	2002233 2001068	TRIPROOF12-SS TRIPROOF40W12-TRI-SS-EM
	4410 lm	110 lm/W	4000K				
	4050 lm	101 lm/W	6500K				

Nominal Length 1500mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
60W	5600 lm	93 lm/W	4000K	1515 x 116 x 74mm	3.50kg 3.70kg	2001170 2001171	TRIPROOF60W15-TRI TRIPROOF60W15-TRI-EM
	6000 lm	100 lm/W	5000K				
	5700 lm	95 lm/W	6500K				

EM = Emergency **SS** = Intellisensor


SPECIFICATIONS

Body Material: Polycarbonate	Driver: Integral	Smart: KASTA Compatible
Diffuser Material: Polycarbonate (Opal)	Power Connection: PA14 Terminals	Dimming: Non-Dimmable
Body colour: Grey	Input: 220-240V, 50/60Hz	DALI Dimmable Models Available. See Page 212.
IP Rating: IP65	Electrical Classification: Class 1	
IK Rating: IK08	Power Factor: >0.9	
Food Grade Approval: HACCP	Protection: Overload / Short Circuit	
Beam Angle: 120°	Lifespan: >50,000hrs @Ta25°C (L70)	
CRI: >80	Operating Ambient Temperature: -20 to 45°C	
SDCM: <5		

APPLICATIONS

Car Parks
Cool Rooms
Outdoor
Kitchen
Office
Industrial
Temporary Lighting

DIMENSIONS

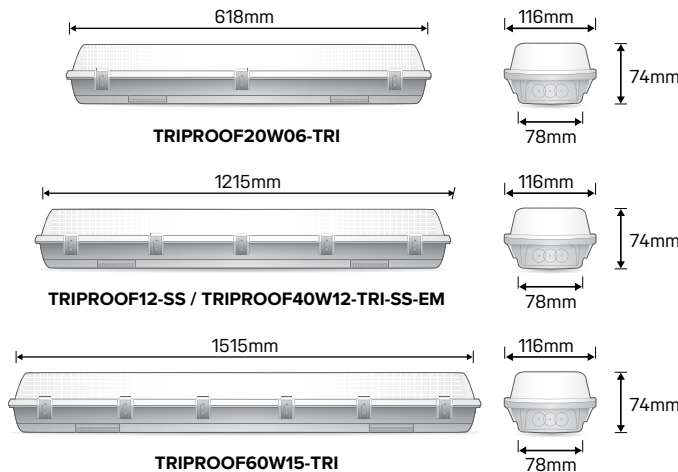

FIND OUT MORE:

