



# SOLO

## Lighting Control and Automation

Switch sorted? Dim it down with SOLO.

Modern rotary dimmer for optimum dimming control. The SOLO LED Dimmer features advanced phase-cut dimming technology and an optimised dimming range for reliable, smooth and precise control of Haneco's dimmable luminaires.

### Features

- Suitable for compatible Haneco LED fittings
- Load correction capacitor included for loads < 10W
- Simple 2-wire design for easy installation
- Compatible with standard wall plates & apertures



## Product Overview


MAX LOAD WATTAGE	DIMMING METHOD	SAP CODE	PRODUCT CODE
350W	Phase-Cut Dimming	2002358	SOLO350W

### SPECIFICATIONS

Dimming Method:	Phase-Cut Dimming (TE)	Overcurrent Protection:	Yes	Housing:	Acrylic
Supply Voltage:	220-240 V, 50 / 60 Hz	Overvoltage Protection:	Yes	Connection Insulation:	PVC
Max. Load Wattage:	350W	Overtemperature Protection:	Yes	Warranty:	3 yrs
Dimming Range :	2 % to 100 %	Noise Immunity:	Yes	<b>QUICK FACTS</b>	
Operating Ambient Temp. :	0 to 40 °C	Retain Dimmer Setting:	Yes	<ul style="list-style-type: none"> <li>• Trailing edge dimmer suitable for compatible Haneco fittings</li> <li>• Maximum load 350W (e.g. over twenty LED downlights)</li> <li>• Compatible with standard wall plates and apertures</li> <li>• Simple 2 wire design for easy installation</li> </ul>	
Thermal Derating:	-20 to 70 °C	Mechanical Stop:	Yes		
Weight:	25 g	Connection Type:	110mm Flying Leads		

Lighting Control and Automation

### DIMENSIONS (mm)

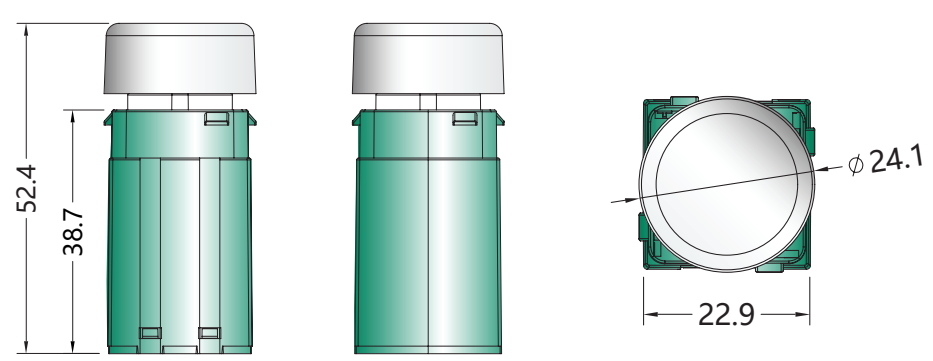

### ACCESSORIES

<p><b>SOLO-KNOB-WH</b></p> <p>White Dimmer Knob For LED SOLO Dimmer</p>	<p><b>SOLO-KNOB-BK</b></p> <p>Black Dimmer Knob For LED SOLO Dimmer</p>	<p><b>LCC25UF</b></p> <p>Load Correction Capacitor 0.33uF/305Vac Capacitance Value</p>
---	---	--

