


Catalogue No: CA7-43-00-110VAC

CONTACTOR 22kW 3P 110V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

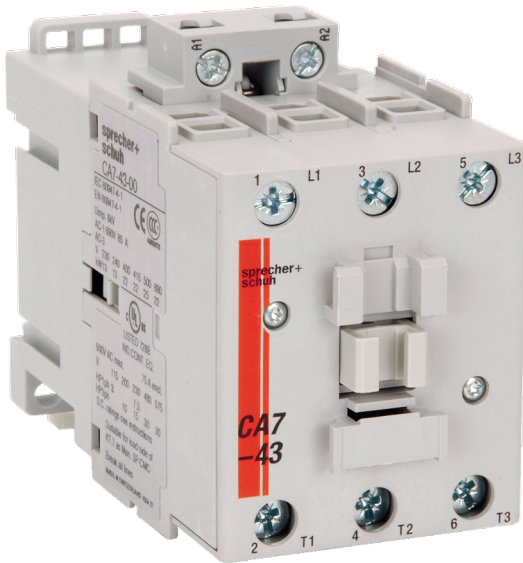

Contactor 3 pole 43A 22kW 110V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CA7-43
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	85 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	22 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	43 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	22 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	25 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	3.3 VA 13.3
Coil Consumption Pickup VA AC coiled contactors	135 VA
Integrated Aux	No Auxiliary Contacts
Coil Voltage	110 V AC V
Un, Coil Voltage, AC @50Hz, Nom	110 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	93 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	121 V AC max @50Hz
Un, Coil Voltage, AC @60Hz, Nom	120 V AC nom @60Hz
Un, Coil Voltage, AC @60Hz, Min	102 V AC min @60Hz
Un, Coil Voltage, AC @60Hz, Max	132 V AC max @60Hz
IP Rating	IP20

Catalogue No: CA7-43-00-110VAC

CONTACTOR 22kW 3P 110V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



REFERENCES

IECEX Certificate -


Supplier Declaration of
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue
& Product Selection: -

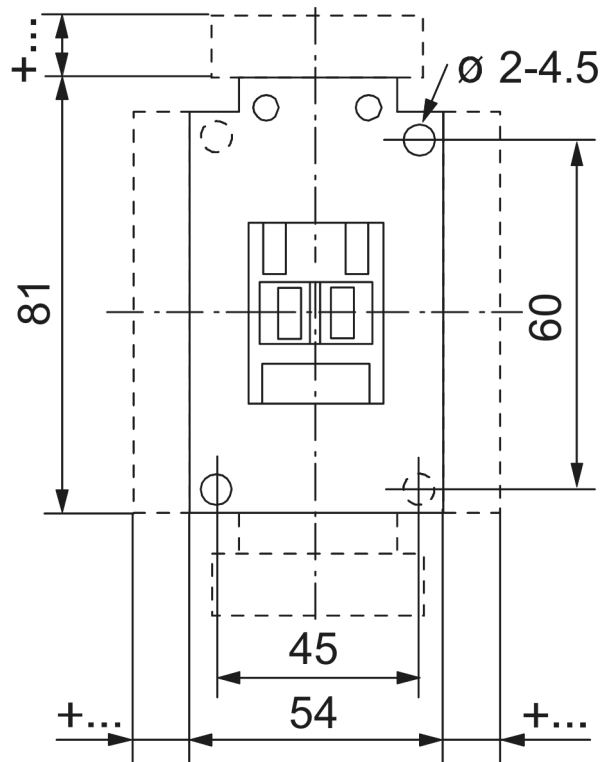

Dimension Diagram